



FortiAnalyzer[™]
Centralized logging, analytics and reporting



FortiAnalyzer platforms integrate network logging, analytics, and reporting into a single system, delivering increased knowledge of security events throughout your network. The FortiAnalyzer family minimizes the effort required to monitor and maintain acceptable use policies, as well as identify attack patterns to help you fine tune your policies. Organizations of any size will benefit from centralized security event logging, forensic research, reporting, content archiving, data mining and malicious file quarantining.

You can deploy FortiAnalyzer physical or virtual appliances to collect, correlate, and analyze geographically and chronologically diverse security data. Aggregate alerts and log information from Fortinet appliances and third-party devices in a single location, providing a simplified, consolidated view of your security posture. In addition, FortiAnalyzer platforms provide detailed data capture for forensic purposes to comply with policies regarding privacy and disclosure of information security breaches.

Key Features & Benefits

Graphical Summary Reports	Provides network-wide reporting of events, activities and trends occurring on FortiGate® and third-party devices.
Network Event Correlation	Allows IT administrators to quickly identify and react to network security threats across the network.
Scalable Performance and Capacity	FortiAnalyzer family models support thousands of FortiGate and FortiClient™ agents, and can dynamically scale storage based on retention/compliance requirements.
Centralized Logging of Multiple Record Types	Including traffic activity, system events, viruses, attacks, web filtering events, and email filtering.
Seamless Integration with the Fortinet Product Portfolio	Tight integration allows FortiAnalyzer resources to be managed from FortiGate or FortiManager™ user interfaces.
Choice of Standalone, Collector or Analyzer mode	Can be deployed as an individual unit or optimized for a specific operation (such as Store & Forward or Analytics).
Virtual and Physical Appliance Form Factors	Available for VMware ESX/ESXi, Microsoft Hyper-V, Amazon Web Services (AWS) and in multiple hardware appliance form factors. Virtual appliances support deployment in centralized storage as enabled by the virtualization or cloud environment (SAN, NAS, etc., .)

Fortinet's Versatile Management Solution

Networks are constantly evolving due to threats, organizational growth or new regulatory/business requirements. Traditional analysis products focus on recording and identifying company-wide threats through logging, analysis and reporting over time.

FortiAnalyzer offers enterprise class features to identify these threats, but also provides flexibility to evolve along with your ever-changing network. FortiAnalyzer can generate highly customized reports for your business requirements while aggregating logs in a hierarchical, tiered logging topology.

Key tenets of Fortinet's management versatility:

- · Diversity of form factors
- Architectural flexibility
- · Highly customizable
- · Simple licensing







Reporting and Visualization Tools

FortiView Summary Views

Generation ad-hoc graphical, filterable views of top users, applications, destinations, websites, threats, VPN usage and more.

• Built-in Report Templates

Utilize or modify the PDF templates to display colorful, comphrehensive, graphical network security and usage reports.

• UTM & Traffic Summary Reports

Regularly analyze the security profile and traffic/bandwidth patterns with a new consolidated UTM/Traffic report.

Event Management


Raise and monitor important events to present the IT administrator with unprecedented insight into potentially anomalous behavior.

Import/Export Templates

After building a report, export and modify the configuration on another FortiAnalyzer or different ADOM.

JSON and XML (Web Services) APIs

- APIs are available on all FortiAnalyzer hardware models and virtual machines
- JSON API Allows MSSPs/large enterprises to manipulate FortiAnalyzer reports, charts/datasets and objects
- XML API Enables IT administrators to quickly provision/configure FortiAnalyzer and generate reports
- Access tools, sample code, documentation and interact with the Fortinet developer community by subscribing to the Fortinet Developer Network (FNDN)

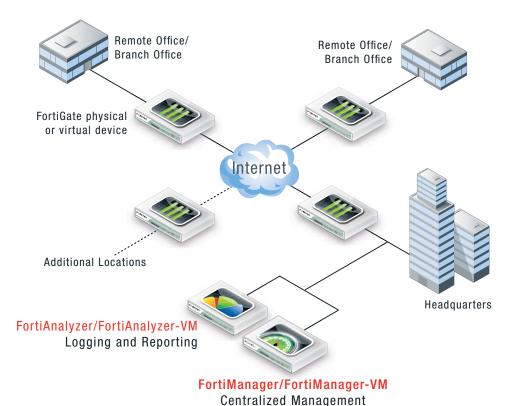

Log Viewer

- View logs in real-time or historical
- Select from traffic, event and full security logs
- Browse by device, ADOM or in aggregate
- Log filtering and search capabilities
- Granular inspection with the log details pane
- Intuitive icons for countries, applications, etc.

Event Management

- Comprehensive alert builder
- Trigger off of severity levels, specific events, actions and destinations
- Set varying threshholds by number of events within a certain timeframe
- View or search through historical alerts
- Notify via email/SNMP or raise a syslog event

Better with FortiManager

- Enterprise-class device management
- Familiar GUI for full network control
- Available as integrated solution with FortiAnalyzer

DLP Archiving

- Investigate DLP content archives
- Supported archive types include: email, HTTP, FTP, IM
- View archive text or download files

FortiAnalyzer Supported Devices

- FortiGate Multi-Threat Security Systems
- FortiMail Messaging Security Systems
- FortiClient Endpoint Security Suite
- FortiWeb Web Application Security
- FortiManager Centralized Management
- FortiSandbox Threat Protection
- FortiCache Web Caching
- Any Syslog-Compatible Device

SPECIFICATIONS

	FORTIANALYZER OOOR	FORTIANALYZER 200R	FORTIANALYZED 1000D	FORTIANALYZER GOOOR	
One of the end Desfares area	FORTIANALYZER 200D	FORTIANALYZER 300D	FORTIANALYZER 1000D	FORTIANALYZER 2000B	
Capacity and Performance	_				
GB/Day of Logs	5	15	25	75	
Sessions/Day	18 M	55 M	85 M	260 M	
Peak Log Rate (Standalone Mode)	350	625	1,000	5,000	
Sustained Log Rate (Standalone Mode)	120	200	350	1,500	
Average Retention at 5 GB Logs/Day	3 months	1 year	2 years	3 years	
Devices/VDOMs/ADOMs (Maximum)	150	175	2,000	2,000	
Hardware Specifications					
Form Factor	1 RU Rackmount	1 RU Rackmount	2 RU Rackmount	2 RU Rackmount	
Total Interfaces	4x GE	4x GE	6x GE, 2x GE SFP	6x GE	
Number of Hard Drives	1	2	4	2 (6 Drives Maximum)	
Removable Hard Drives	No	No	Yes	Yes	
Storage Capacity	1x 1 TB	2x 2 TB 4x 2 TB		2x 2 TB (12 TB Maximum)	
RAID Storage Management	No	Yes (mirrored) Yes (0, 1, 5, 6, 10)		Yes (0, 1, 5, 10, 50)	
Redundant Hot Swap Power Supplies	No	No	Yes	Yes	
Dimensions					
Height x Width x Length (inches)	1.8 x 17.1 x 13.9	1.7 x 17.1 x 14.3	3.5 x 17.2 x 14.5	3.4 x 17.4 x 26.8	
Height x Width x Length (cm)	4.5 x 43.3 x 35.2	4.4 x 43.5 x 36.4	9 x 43.8 x 36.8	8.6 x 44.3 x 68.1	
Weight	13.4 lbs (6.1 kg)	15.9 lbs (7.2 kg)	30.6 lbs (13.9 kg)	63 lbs (28.6 kg)	
Environment	V- V/	, y,	, · J/	, <i>y</i> /	
AC Power Supply	100-240V AC, 50-60 Hz, 6 Amp Max.	100–240V AC, 50–60 Hz, 4 Amp Max.	100-240V AC, 50-60 Hz, 5 Amp Max.	100-240V AC, 50-60 Hz, 9 Amp Max.	
Power Consumption (Average)	60 W	162 W	133 W	200 W	
Heat Dissipation	205 BTU/h	666 BTU/h	546 BTU/h	519 BTU/h	
Operating Temperature	32-104°F (0-40°C)	50–95°F (10–35°C)	32-104°F (0-40°C)	50-95°F (10-35°C)	
Storage Temperature	-13–158°F (-35–70°C)	-40–158°F (-40–70°C)	-13–158°F (-25–70°C)	-40–149°F (-40–65°C)	
Humidity	5–95% non-condensing	8–90% non-condensing	5–95% non-condensing	5–95% non-condensing	
Operating Altitude	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	
Compliance					
Safety Certifications	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST	
	FORTIANALYZER 3000E	FORTIANALYZER 3500E	FORTIAN	FORTIANALYZER 3900E	
Capacity and Performance					
Capacity and Performance GB/Day of Logs	800	Unrestricted*	Unrestricte		
• •	800 850 M			od*	
GB/Day of Logs		Unrestricted*	Unrestricte	od*	
GB/Day of Logs Sessions/Day	850 M	Unrestricted* Unrestricted*	Unrestricte Unrestricte	od*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode)	850 M 50,000	Unrestricted* Unrestricted* 60,000	Unrestricte Unrestricte 75,000	od*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode)	850 M 50,000 15,000	Unrestricted* Unrestricted* 60,000 20,000	Unrestricte Unrestricte 75,000 25,000	od*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day	850 M 50,000 15,000 4 years	Unrestricted* Unrestricted* 60,000 20,000 6 years	Unrestricte Unrestricte 75,000 25,000 3.5 years	od*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum)	850 M 50,000 15,000 4 years	Unrestricted* Unrestricted* 60,000 20,000 6 years	Unrestricte Unrestricte 75,000 25,000 3.5 years	od*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications	850 M 50,000 15,000 4 years 4,000	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000	od* cd* cmount	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000	od* cd* cmount	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Raci 2x GE, 2x	od* cd* cmount	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max)	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Raci 2x GE, 2x 15 Yes	od* cd* cmount	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Rac 2x GE, 2x 15 Yes 15x 960	xmount GE SFP+	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Rac 2x GE, 2x 15 Yes 15x 960	xmount GE SFP+ SB (14.4 TB Maximum)	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Rac 2x GE, 2x 15 Yes 15x 960 1) Yes (0, 1,	xmount GE SFP+	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60) Yes	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Rac 2x GE, 2x 15 Yes n) 15x 960 (1) Yes (0, 1, Yes)	cd* cd* cd* cd* cmount GE SFP+ GB (14.4 TB Maximum) 5, 6, 10, 50, 60)	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches)	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60) Yes 6.9 x 19.1 x 27.2	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Racc 2x GE, 2x 15 Yes 10) 15x 960 (1) Yes (0, 1, Yes) 3.5 x 17.	cd*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm)	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Raci 2x GE, 2x 15 Yes 10) 15x 960 1) Yes (0, 1, Yes 3.5 x 17:	cd*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60) Yes 6.9 x 19.1 x 27.2	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Racc 2x GE, 2x 15 Yes 10) 15x 960 (1) Yes (0, 1, Yes) 3.5 x 17.	cd*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg)	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Raci 2x GE, 2x 15 Yes 10) 15x 960 (1) Yes (0, 1) Yes 3.5 x 17: 89 x 437 52 lbs (2	chd* chd* chd* chd* chd* chd* chd* chd*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg)	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Raci 2x GE, 2x 15 Yes n) 15x 960 i) Yes (0, 1, Yes 3.5 x 17.: 89 x 437 52 lbs (2	ced* ced* ced* ced* ced* ced* ced* ced*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average)	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Rac 2x GE, 2x 15 Yes 15 Yes 0) Yes (0, 1, Yes 3,5 x 17. 89 x 437 52 lbs (2	xmount GE SFP+ GB (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) VAC, 50–60 Hz, 11.5 Amp Maximum 15 HDD	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Rac 2x GE, 2x 15 Yes 15 Yes 0) 15x 960 0 0) Yes (0, 1, Yes 3,5 x 17. 89 x 437 52 lbs (2 41.5 Amp Maximum 100–240 470 W for 1637 BTL	xmount GE SFP+ GB (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) V AC, 50–60 Hz, 11.5 Amp Maximum 15 HDD Uh	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation Operating Temperature	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h 50–95°F (10–35°C)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h 32–104°F (0–40°C)	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Rac 2x GE, 2x 15 Yes 15 Yes 0) 15x 960 0 0) Yes (0, 1, Yes) 3.5 x 17: 89 x 437 52 lbs (2 470 W for 1637 BTL 50-95°F	xmount GE SFP+ GB (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) V AC, 50–60 Hz, 11.5 Amp Maximum 15 HDD Uh (10–35°C)	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation Operating Temperature Storage Temperature	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h 50–95°F (10–35°C) -40–149°F (-40–65°C)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h 32–104°F (0–40°C) -13–158°F (-25–70°C)	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Raci 2x GE, 2x 15 Yes 15 Yes n) 15x 960 n) Yes (0, 1, Yes) 3.5 x 17 89 x 437 52 lbs (2 ,11.5 Amp Maximum 100–240 470 W for 1637 BTL 50–95°F -40–60°(xmount GE SFP+ GB (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) V AC, 50–60 Hz, 11.5 Amp Maximum 15 HDD V/h (10–35°C) C (-40–140°F)	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation Operating Temperature Storage Temperature Humidity	850 M 50,000 15,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h 50–95°F (10–35°C) -40–149°F (-40–65°C) 20–90% non-condensing	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h 32–104°F (0–40°C) -13–158°F (-25–70°C) 10–90% non-condensing	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Raci 2x GE, 2x 15 Yes 15 Yes n) 15x 960 i yes (0, 1, Yes) 3.5 x 17.: 89 x 437 52 lbs (2 , 11.5 Amp Maximum 100–240 470 W for 1637 BTL 50–95°F -40–60°(5–95% (r	xmount GE SFP+ GB (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) V AC, 50–60 Hz, 11.5 Amp Maximum 15 HDD I/h (10–35°C) C (-40–140°F) Ion-condensing)	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation Operating Temperature Humidity Operating Altitude	850 M 50,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h 50–95°F (10–35°C) -40–149°F (-40–65°C)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h 32–104°F (0–40°C) -13–158°F (-25–70°C)	Unrestricte Unrestricte 75,000 25,000 3,5 years 4,000 2 RU Raci 2x GE, 2x 15 Yes 15 Yes n) 15x 960 i yes (0, 1, Yes) 3.5 x 17.: 89 x 437 52 lbs (2 , 11.5 Amp Maximum 100–240 470 W for 1637 BTL 50–95°F -40–60°(5–95% (r	xmount GE SFP+ GB (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) V AC, 50–60 Hz, 11.5 Amp Maximum 15 HDD V/h (10–35°C) C (-40–140°F)	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation Operating Temperature Humidity Operating Altitude Compliance	850 M 50,000 15,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h 50–95°F (10–35°C) -40–149°F (-40–65°C) 20–90% non-condensing Up to 7,400 ft (2,250 m)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h 32–104°F (0–40°C) -13–158°F (-25–70°C) 10–90% non-condensing Up to 7,400 ft (2,250 m)	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Racc 2 x GE, 2x 15 Yes 15 Yes 0) 15x 960 1 15x 960 1 Yes (0, 1, Yes) 3.5 x 17: 89 x 437 52 lbs (2 11.5 Amp Maximum 100–240 470 W for 1637 BTL 50–95% (r Up to 7,44	cd*	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation Operating Temperature Humidity Operating Altitude	850 M 50,000 15,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h 50–95°F (10–35°C) -40–149°F (-40–65°C) 20–90% non-condensing Up to 7,400 ft (2,250 m) FCC Part 15 Class A, C-Tick, VCCI, CE,	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h 32–104°F (0–40°C) -13–158°F (-25–70°C) 10–90% non-condensing Up to 7,400 ft (2,250 m) FCC Part 15 Class A, C-Tic	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Rac 2 x GE, 2x 15 Yes 15 Yes n) 15x 960 i 3,5 x 17. 89 x 437 52 lbs (2 11.5 Amp Maximum 100–240 470 W for 1637 BTL 50–95°F -40–60°C 5–95% (r Up to 7,4i kk, VCCI, CE, FCC Part	xmount GE SFP+ 3B (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) VAC, 50–60 Hz, 11.5 Amp Maximum 15 HDD Uh (10–35°C) C (-40–140°F) Ion-condensing) 00 ft (2,250 m)	
GB/Day of Logs Sessions/Day Peak Log Rate (Standalone Mode) Sustained Log Rate (Standalone Mode) Average Retention at 5 GB Logs/Day Devices/VDOMs/ADOMs (Maximum) Hardware Specifications Form Factor Total Interfaces Number of Hard Drives Removable Hard Drives Storage Capacity RAID Storage Management Redundant Hot Swap Power Supplies Dimensions Height x Width x Length (inches) Height x Width x Length (cm) Weight Environment AC Power Supply Power Consumption (Average) Heat Dissipation Operating Temperature Humidity Operating Altitude Compliance	850 M 50,000 15,000 15,000 4 years 4,000 2 RU Rackmount 4x GE, 2x GE SFP 8 Yes 8x 2 TB (16 TB Maximum) Yes (0, 1, 5, 6, 10, 50, 60) Yes 3.4 x 19 x 29.7 8.7 x 48.2 x 75.5 71.5 lbs (32.5 kg) 100–240V AC, 50–60 Hz, 10 Amp Maxi 375.8 W 1947 BTU/h 50–95°F (10–35°C) -40–149°F (-40–65°C) 20–90% non-condensing Up to 7,400 ft (2,250 m)	Unrestricted* Unrestricted* 60,000 20,000 6 years 4,000 4 RU Rackmount 2x GE, 2x GE SFP 12 (24 Drives Max) Yes 12x 2 TB (48 TB Maximun Yes (0, 1, 5, 6, 10, 50, 60 Yes 6.9 x 19.1 x 27.2 17.5 x 48.5 x 69.0 77 lbs (34.9 kg) mum 100–240V AC, 50–60 Hz 465 W for 12 HDD 1904 BTU/h 32–104°F (0–40°C) -13–158°F (-25–70°C) 10–90% non-condensing Up to 7,400 ft (2,250 m)	Unrestricte Unrestricte 75,000 25,000 3.5 years 4,000 2 RU Racc 2 x GE, 2x 15 Yes 15 Yes 0) 15x 960 1 15x 960 1 Yes (0, 1, Yes) 3.5 x 17: 89 x 437 52 lbs (2 11.5 Amp Maximum 100–240 470 W for 1637 BTL 50–95% (r Up to 7,44	xmount GE SFP+ 3B (14.4 TB Maximum) 5, 6, 10, 50, 60) 2 x 26.9 x 684 3.6 kg) VAC, 50–60 Hz, 11.5 Amp Maximum 15 HDD Uh (10–35°C) C (-40–140°F) Ion-condensing) 00 ft (2,250 m)	

^{*} Only restricted to the hardware platform performance (e.g. there are no software licensing limitations)

SPECIFICATIONS

	FAZ-VM-BASE	FAZ-VM-GB1	FAZ-VM-GB5	FAZ-VM-GB25	FAZ-VM-GB100	
Capacity and Performance						
GB/Day of Logs	1 incl.**	+1	+5	+25	+100	
Sessions/Day	3.5 M	3.5 M	18 M	85 M	360 M	
Device Quota ***	200 GB	200 GB	1 TB	8 TB	16 TB	
Devices/ADOMs/VDOMs Supported (Maximum)	10,000	10,000	10,000	10,000	10,000	
Hypervisor Support		VMware ESX/ESXi 4.0/4.1/5.0/5.1/5.5, Microsoft Hyper-V 2008 R2 / 2012, AWS (Amazon Web Services) AMI				
Network Interface Support (Minimum / Maximum)		1/4				
vCPUs (Minimum / Maximum)		1 / Unlimited				
Memory Support (Minimum / Maximum)		1 GB / Unlimited				

^{**} Unlimited GB/Day when deployed in collector mode



GLOBAL HEADQUARTERS EMEA SALES OFFICE

Fortinet Inc. 899 Kifer Road Sunnyvale, CA 94086 United States Tel: +1.408.235.7700 Fax: +1.408.235.7737

120 rue Albert Caquot 06560, Sophia Antipolis, France Tel: +33.4.8987.0510

Fax: +33.4.8987.0501

APAC SALES OFFICE

300 Beach Road #20-01 The Concourse Singapore 199555 Tel: +65.6513.3730 Fax: +65.6223.6784

LATIN AMERICA SALES OFFICE

Prol. Paseo de la Reforma 115 Int. 702 Col. Lomas de Santa Fe, C.P. 01219 Del. Alvaro Obregón México D.F. Tel: 011-52-(55) 5524-8480

Copyright© 2014 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.

^{***} Device quota is not stackable, this represents the maximum quota available with purchased license.